


TABB (Formerly TAIBB)

Measuring Current Transformers



- Busbar window 16 x 12.5mm
- 21mm dia cable aperture
- Hinged terminal cover
- With fixing feet & DIN rail adaptor
- Secondary terminals M4 screws
- Weight 180g
- Optional sealable terminal cover (ATACOP12)

Dimensions

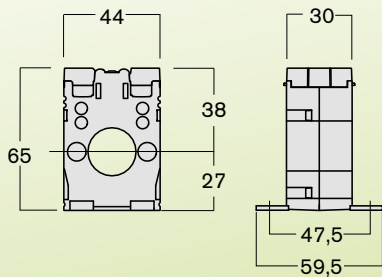

Current Transformer Ratios

Primary Current A	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
40	-	-	1	400
50	-	1.3	1.5	500
60	-	1.3	2	600
70	-	1.5	2.5	700
75	-	1.5	2.5	750
80	-	1.5	2.5	800
100	2	2.5	3.5	100
120	2.5	3.5	4	120
125	2.5	3.5	4	125
150	3	4	5	150
160	3	4	5	160
200	4	5.5	6	200
250	5	6	7	250
300	6	7.5	8	300

1A or 5A Secondary

How to Order / Model Reference

eg **TABB 50 C 200**

Model	TABB			
Output				
-/5A Secondary		50		
-/1A Secondary		10		
Primary				
50...80A			B	
100...300A			C	
Range				
Select code from ratio table above				???

DATA SHEET : RD1195


TAIA (Formerly TAI200)

Measuring Current Transformers



- Busbar window 20 x 5mm
- 22mm dia cable aperture
- Moulded terminal cover
- Moulded DIN rail clip/mounting feet
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Weight 290g
- Optional sealable terminal cover (ATACOP1)

Dimensions



Current Transformer Ratios

Primary Current A	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
50	-	-	2	500
60	-	-	2.5	600
70	-	-	3	700
75	-	-	3	750
80	-	-	3	800
100	-	2	4	100
120	-	3	5	120
125	-	3	5	125
150	2	4	6	150
160	2	4	6	160
200	3	6	8	200
250	5	8	10	250

1A or 5A Secondary

How to Order / Model Reference

eg **TAIA 50 C 200**

Model	TAIA			
Output				
-/5A Secondary		50		
-/1A Secondary		10		
Primary				
50...80A			B	
100...250A			C	
Range				
Select code from ratio table above				???

DATA SHEET : RD1200


TAIB (Formerly TAI210)

Measuring Current Transformers



- Busbar window 20.5 x 5.5mm
- 17mm dia cable aperture
- Moulded terminal cover
- Moulded DIN rail clip/mounting feet
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Weight 240g

Dimensions



Current Transformer Ratios

Primary Current A	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
50	-	-	1.5	500
60	-	-	1.5	600
70	-	-	2	700
75	-	-	2	750
80	-	-	2	800
100	-	1.5	1.5	100
120	-	2	3	120
125	-	2	3	125
150	-	2.5	4	150
160	-	2.5	4	160
200	2	4	6	200

1A or 5A Secondary

How to Order / Model Reference

eg **TAIB 50 C 800**

Model	TAIB			
Output				
-/5A Secondary		50		
-/1A Secondary		10		
Primary				
50...80A			B	
100...200A			C	
Range				
Select code from ratio table above				???

DATA SHEET : RD1205