


TASN (Formerly TAS81)

Measuring Current Transformers



- Busbar window 81 x 11mm, 64 x 31mm, 31 x 51mm
- Supplied with busbar mounting bracket
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Optional sealable terminal cover (ATACOP03)
- Weight 470g
- Optional double ratio

Dimensions

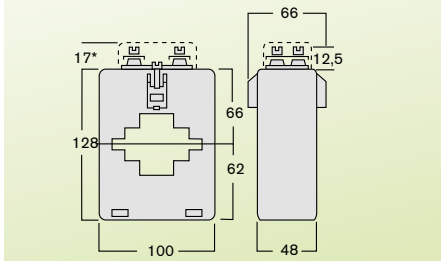

Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
400	-	2	3	400
500	2	4	6	500
600	3	5	8	600
700	4	6	8	700
750	4	6	8	750
800	4	8	8	800
1000	6	8	10	100
1200	8	10	12	120
1250	8	10	12	125
1500	10	12	15	150
1600	10	12	15	160
2000	10	12	15	200
2500	10	12	15	250

1A or 5A Secondary

How to Order / Model Reference

eg **TASN 50 C 600 3**

Model	TASN
Output	
-/5A Secondary	50
-/1A Secondary	10
Primary	
400...800A	C
1000...2500A	D
Range	
Select code from ratio table above	???
Mounting	
Horizontal mounting (optional)	3

DATA SHEET : RD1270


TASO (Formerly TAS84)

Measuring Current Transformers



- Busbar window 84 x 34mm
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Supplied with busbar mounting clamps
- Secondary pillar screw terminals
- Optional sealable terminal cover (ATACOP04)
- Option - horizontal mounting (terminals on long side of CT)
- Weight 700g
- Optional spacer for 60mm bar (ATADIS01)
- Optional double ratio

Dimensions

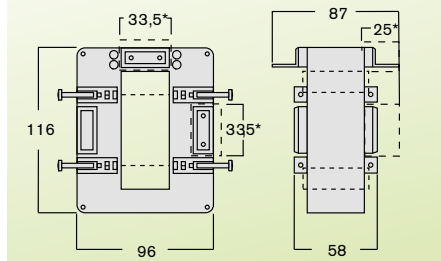

Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
150	-	-	2	150
200	-	-	4	200
250	-	-	5	250
300	-	2	6	300
400	3	5	8	400
500	5	7	10	500
600	6	10	12	600
700	6	10	12	700
750	8	12	15	750
800	8	12	15	800
1000	10	15	20	100
1200	12	15	20	120
1250	12	15	20	125
1500	15	20	25	150
1600	15	20	25	160
2000	20	25	30	200
2500	25	30	40	250

1A or 5A Secondary

How to Order / Model Reference

eg **TASO 50 C 600 3**

Model	TASO
Output	
-/5A Secondary	50
-/1A Secondary	10
Primary	
150...800A	C
1000...2500A	D
Range	
Select code from ratio table above	???
Mounting	
Horizontal mounting (optional)	3

DATA SHEET : RD1275


TASP (Formerly TAS105)

Measuring and Protection Current Transformers



- Busbar window 105 x 38mm
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Supplied with busbar mounting clamps
- Secondary pillar screw terminals
- Optional sealable terminal cover (ATACOP04)
- Option - horizontal mounting (terminals on long side of CT)
- Weight 1,000g

Dimensions

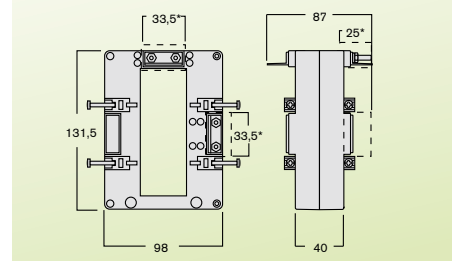

Current Transformer Ratios

Primary Current	Burden					Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	5P5 VA	5P10 VA	
200	-	1	4	-	-	200
250	-	2	5	1	-	250
300	-	3	7	1	-	300
400	1.5	5	8	1	-	400
500	3	8	10	1	-	500
600	5	9	12	1	-	600
700	8	10	12	1	-	700
750	8	10	15	1	-	750
800	8	12	15	1	-	800
1000	10	15	20	1	1	100
1200	12	15	25	2	1.5	120
1250	15	20	25	3	1.5	125
1500	15	20	25	3	1.5	150
1600	15	20	30	3	1.5	160
2000	20	30	40	3	1.5	200
2500	25	30	50	3	1.5	250
3000	25	30	50	3	2	300

1A or 5A Secondary

How to Order / Model Reference

eg **TASP 50 C 600 3**

Model	TASP
Output	
-/5A Secondary	50
-/1A Secondary	10
Primary	
200...800A	C
1000...3000A	D
Range	
Select code from ratio table above	???
Mounting	
Horizontal mounting (optional)	3

DATA SHEET : RD1280