



## TASQ (Formerly TAS125)

### Measuring and Protection Current Transformers

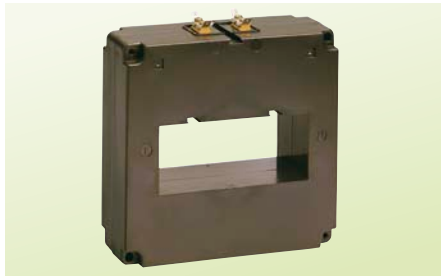

- Busbar window 127 x 54mm
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Optional sealable terminal cover (ATACOP03)
- Weight 2500g

#### Dimensions

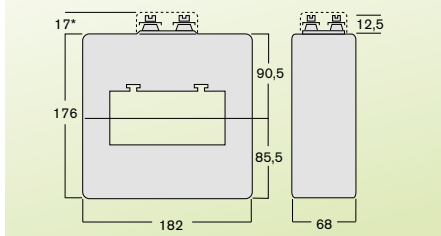

#### Current Transformer Ratios

Primary Current A	Burden					Code
	cl. 0.5 VA	cl. 1 VA	5P5 VA	5P10 VA		
400	3	6	6	3		400
500	6	12	10	3		500
600	15	30	10	5		600
700	20	40	10	5		700
750	20	40	10	5		750
800	20	40	15	5		800
1000	20	40	15	5		100
1200	25	40	20	5		120
1250	25	50	20	5		125
1500	40	80	20	5		150
1600	40	80	20	5		160
2000	50	100	25	5		200
2500	60	120	30	5		250
3000	60	120	40	5		300
4000	100	200	50	5		400

1A or 5A Secondary

DATA SHEET : RD1285


## TASR (Formerly TAS127)

### Measuring Current Transformers



- Busbar window 127 x 38mm
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Supplied with busbar mounting clamps
- Secondary pillar screw terminals
- Optional sealable terminal cover (ATACOP04)
- Option – horizontal mounting (terminals on long side of CT)
- Weight 1500g
- Optional spacer for 100mm bar (ATADIS02)

#### Dimensions

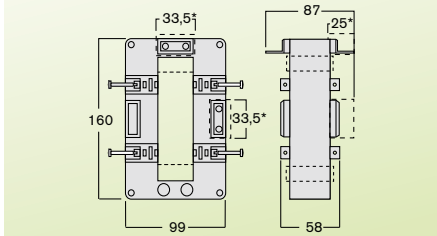

#### Current Transformer Ratios

Primary Current A	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
400	-	3	6	400
500	2	4	8	500
600	4	6	10	600
700	4	8	10	700
750	4	8	10	750
800	4	8	10	800
1000	6	10	-	100
1200	8	12	-	120
1250	8	12	-	125
1500	10	15	-	150
1600	10	15	-	160
2000	15	20	-	200
2500	20	25	-	250
3000	25	30	-	300
3200	25	30	-	320
4000	30	30	-	400

1A or 5A Secondary

DATA SHEET : RD1290


## TASS (Formerly TA5127B)

### Measuring and Protection Current Transformers



- Busbar window 127 x 54mm
- Secondary terminals M4 screws and 6.3 x 0.8mm fast-on
- Supplied with busbar mounting clamps
- Secondary pillar screw terminals
- Optional sealable terminal cover (ATACOP04)
- Option – horizontal mounting (terminals on long side of CT)
- Weight 1,300g

#### Dimensions

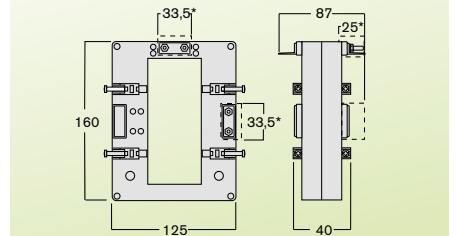

#### Current Transformer Ratios

Primary Current A	Burden					Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	5P5 VA	5P10 VA	
400	1	7	10	2	1	400
500	3	10	14	2.5	1.25	500
600	5	12	17	2.5	1.25	600
700	8	15	20	3	1.5	700
750	10	15	20	3	1.5	750
800	10	15	20	3	1.5	800
1000	12	20	25	4	2	1000
1200	15	25	30	4	2	120
1250	15	25	30	5	2.5	125
1500	20	30	40	5	2.5	150
1600	20	30	40	6	3	160
2000	25	40	50	7	3.5	200
2500	30	50	60	8	4	250
3000	40	60	60	10	5	300
3200	40	60	60	10	5	320
4000	50	60	60	12	6	400

1A or 5A Secondary

DATA SHEET : RD1295

#### How to Order / Model Reference

eg **TASQ 50 C 600**

Model	TASQ				
Output					
-/5A Secondary		50			
-/1A Secondary		10			
Primary					
400...800A			C		
1000...4000A			D		
Range					
Select code from ratio table above				???	

DATA SHEET : RD1285

#### How to Order / Model Reference

eg **TASR 50 C 600 3**

Model	TASR				
Output					
-/5A Secondary		50			
-/1A Secondary		10			
Primary					
400...800A			C		
1000...4000A			D		
Range					
Select code from ratio table above				???	
Mounting					
Horizontal mounting (optional)					3

DATA SHEET : RD1290

#### How to Order / Model Reference

eg **TASS 50 C 600 3**

Model	TASS				
Output					
-/5A Secondary		50			
-/1A Secondary		10			
Primary					
150...800A			C		
1000...4000A			D		
Range					
Select code from ratio table above				???	
Mounting					
Horizontal mounting (optional)					3

DATA SHEET : RD1295